


# The ID.4 Electromechanical Brake Servo (eBKV)

Tablet Format

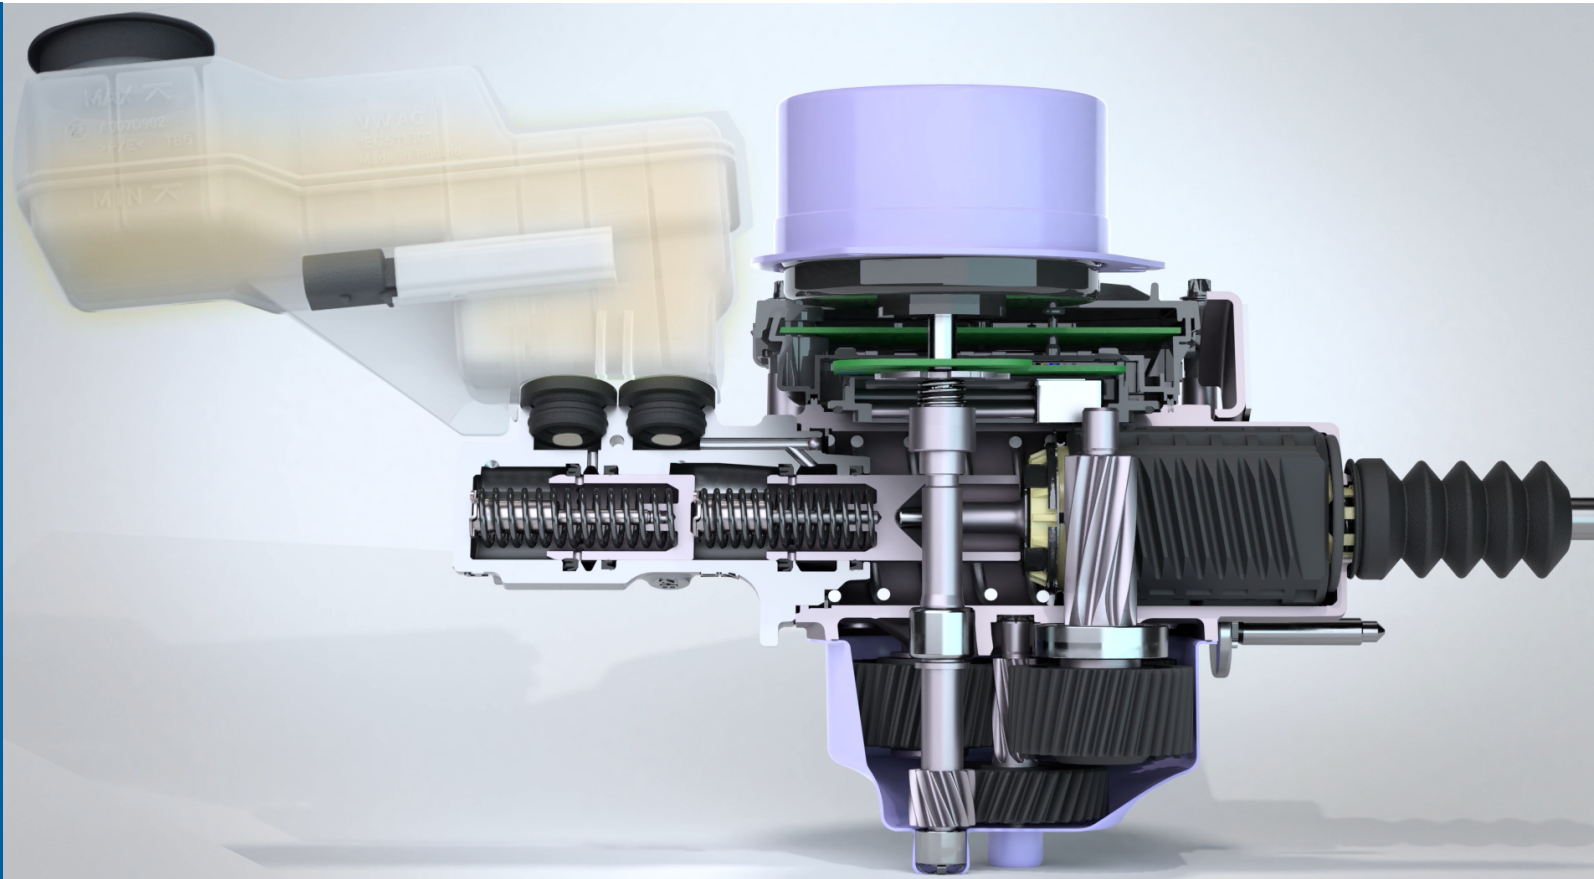

Volkswagen Group Canada, INC.

Volkswagen Canada Academy, Service Training

SSP #861213C, The ID.4 Electromechanical Brake Servo (eBKV) (Tablet Edition)

Ajax, ON, Canada

Edited August 2021

V. 001 / en-CA

Technical status: 02.2021

©2021 Volkswagen Group Canada, INC.

All rights reserved. All information contained in this document is based on the latest information available at the time of printing and is subject to the copyright and other intellectual property rights of Volkswagen Group Canada, INC, its affiliated companies and its licensors. All rights are reserved to make changes at any time without notice. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying recording or otherwise, nor may these materials be modified or reposted to other sites without the prior expressed written permission of the publisher.

All requests for permission to copy and redistribute should be referred to Volkswagen Group Canada, INC.

Trademarks: All brand names and product names used in this manual are trade names, service marks, trademarks, or registered trademarks; and are the property of their respective owners.

## Table of Contents


Introduction.....	1
Design of the eBKV.....	8
Brake Management.....	13
Service .....	19

# Introduction

---

Due to the increasing number of electric vehicles and the low vacuum produced in the intake manifolds on modern combustion engines, a method to enhance braking force is needed. The Electromechanical Brake Servo (eBKV) provides a solution to these concerns.

In addition to enhancing braking force, this system also reduces the total weight of the brake system, allowing further CO<sub>2</sub> emission reduction for vehicles with combustion engines.

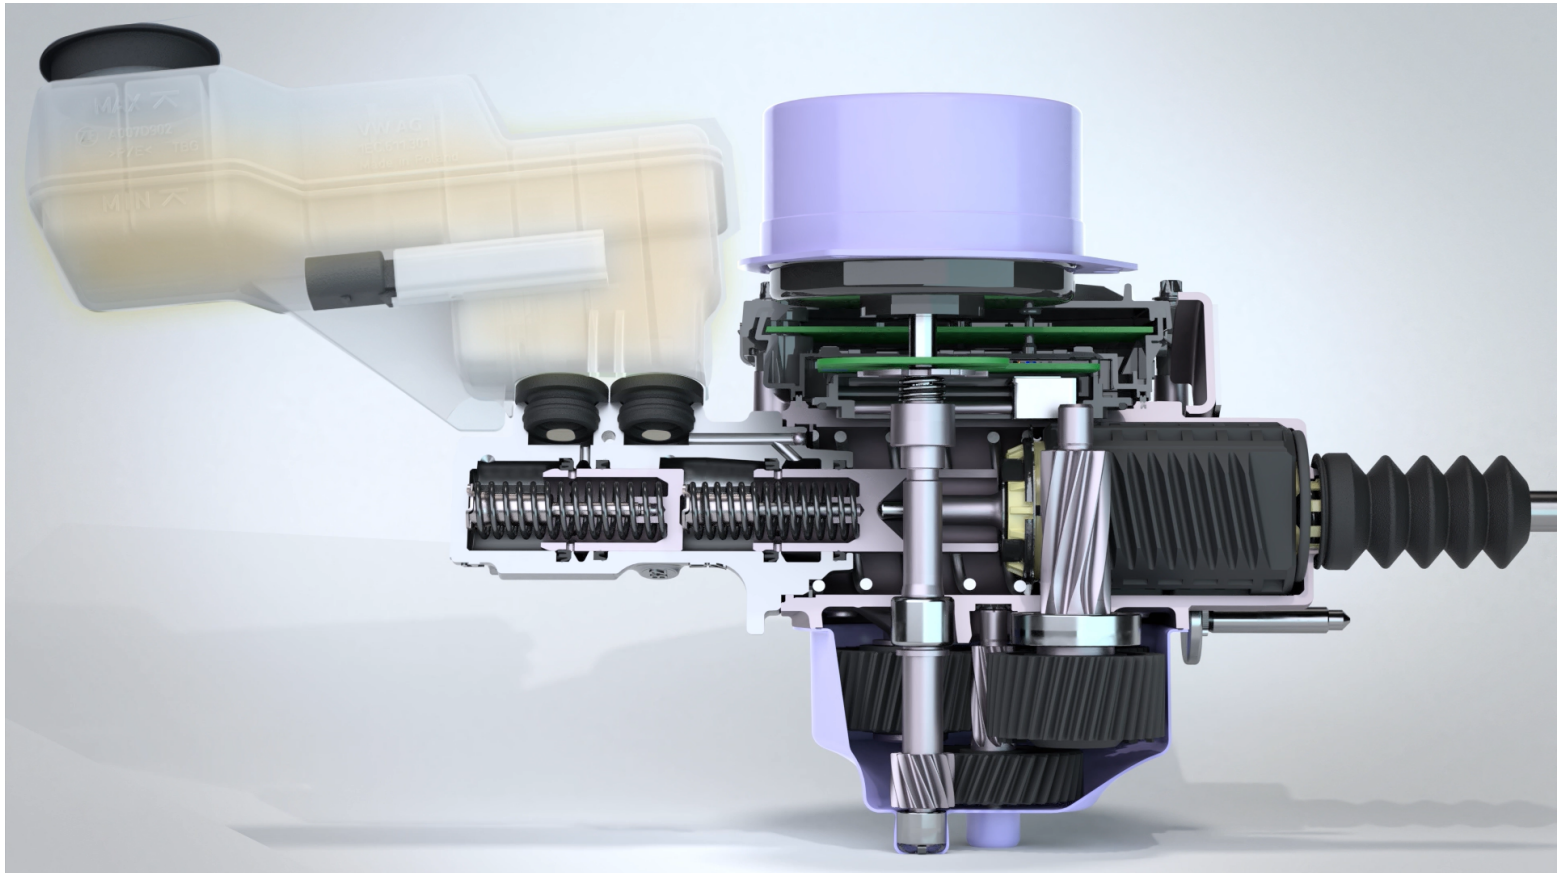


# Introduction

---

## Technical features of the Electromechanical Brake Servo (eBKV):

- Parallel axis electric drive
- Weight-saving gear unit
- Weight saving control unit housing
- Vacuum-free brake force boosting
- No additional pressure accumulator
- Up to 5.3 kN power assistance
- Weight of approx. 4.4 kg
- Motor output 370 W
- Voltage range 9.8–16 V
- Maximum torque of 3.3 Nm

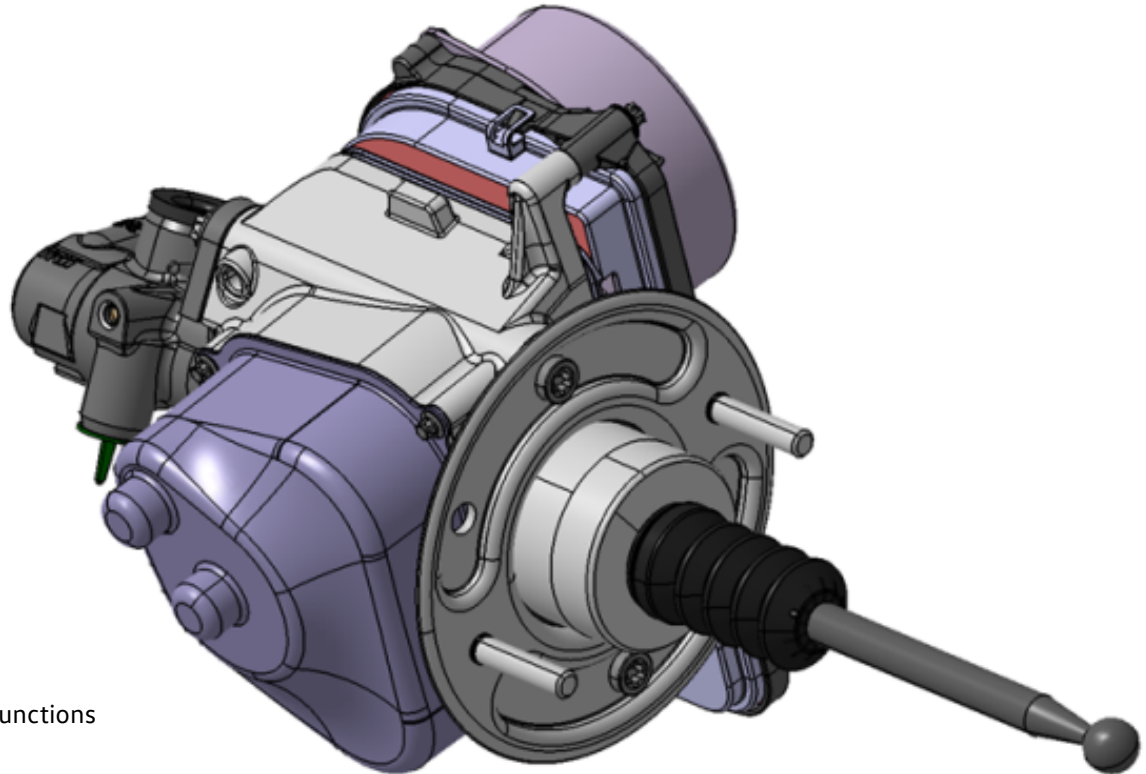

## Advantages of the eBKV

- Particularly fast brake pressure build-up for driver assist functions
- High safety advancement
- Reduced wheel brake drag torque
- Comfortable pedal feel
- CO<sub>2</sub> savings due to weight reduction and omission of vacuum pump
- Long service life
- Redundant brake system for Electronic Stability Control (ESC)

# Introduction

---

## Safety Increases due to the eBKV


The eBKV increases the effectiveness of driver assist systems, such as Front Assist, in potential accident conditions that require extremely high pressure braking increases. This cannot be performed using conventional vacuum-based systems.

This results in a shorter stopping distances than conventional systems:

- A reduced emergency braking distance of up to 1.3 m with deceleration from 30 km/h to a stop
- Collision speeds can be reduced by approximately 3 km/h due to the shorter stopping distance

This also allows pedestrian accident avoidance to be improved by 10%.

Reducing collision speed decreases the energy that the body has to absorb during the impact, improving occupant protection.

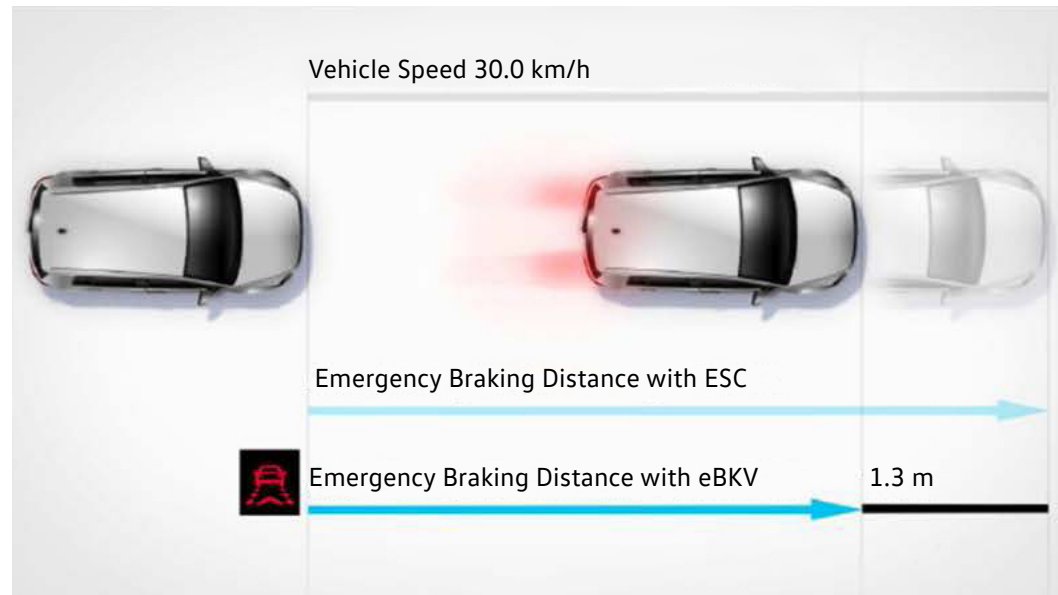


# Introduction

---

## What is Reduced Brake Drag Torque?

Brake drag torque occurs with disc brakes after a braking event. Brake drag torque leads to higher fuel consumption and increased CO<sub>2</sub> emissions.

After a braking event, the brake pads retract to their starting position as brake pressure decreases. Due to slight wobbling of the brake disc in relation to the brake caliper, combined with tight clearance, the whole brake pad does not immediately lose contact with the brake disc. There is still transitional frictional contact between the brake disc and the brake pad. By using a clip in the brake caliper, the pads can be mechanically retracted faster.

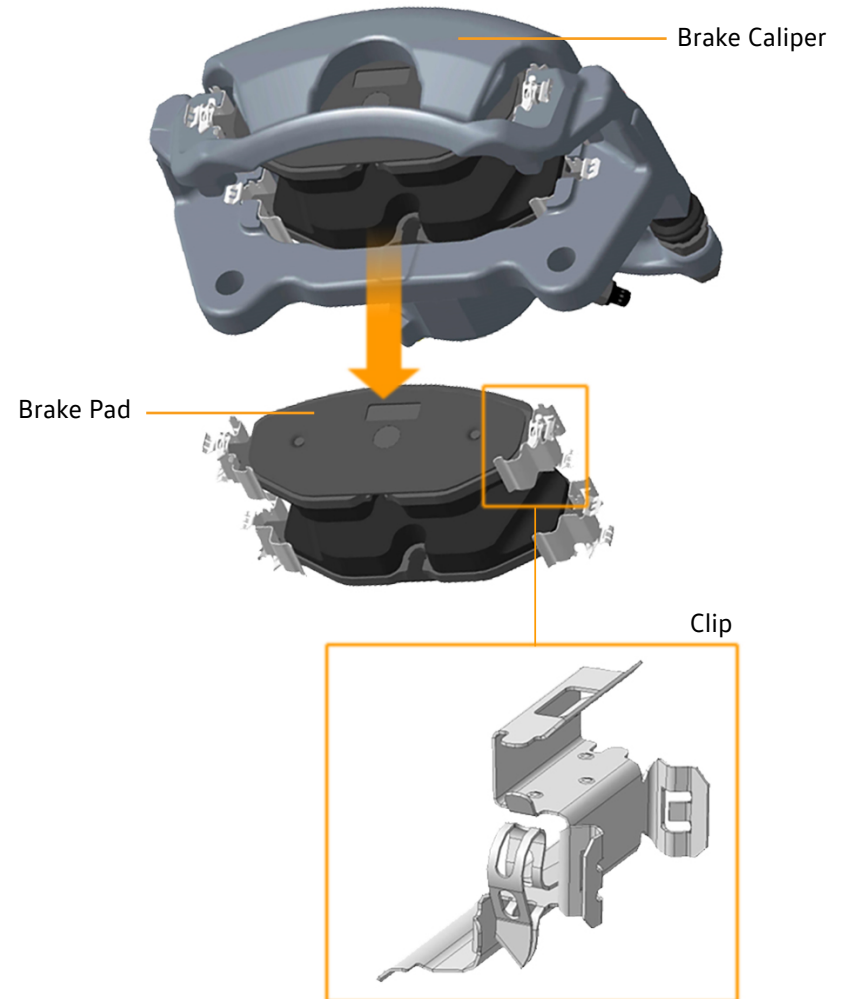

# Introduction


## Conventional, Vacuum-based Brake Systems

Vacuum-based brake systems create vacuum using multiple methods:

- Intake manifold evacuation while the combustion engine is running
- A mechanical vacuum pump
- An electric vacuum pump

These methods have some partial disadvantages:

- Poor CO<sub>2</sub> figures
- Heavy weight
- High production costs

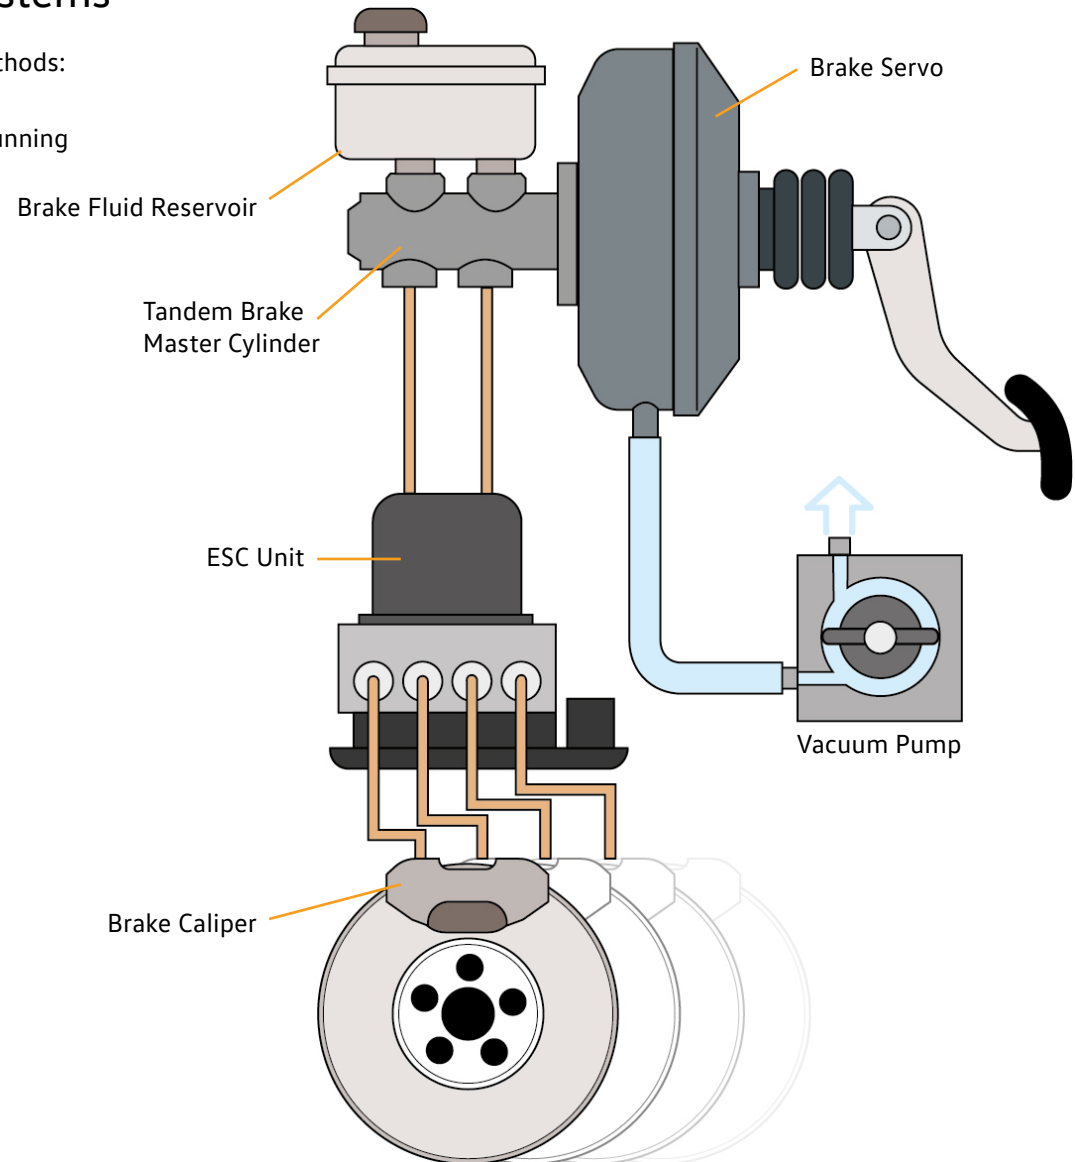



# Introduction


## Current Brake Systems for Electric Vehicles

This is the 1st Generation eBKV. It is used in high-voltage vehicles.

Its distinguishing feature is a special pressure accumulator for the brake system. It stores brake fluid during recuperation, reducing the brake pressure in the system.

The disadvantages are:

- The space required
- The separate drive for the active accumulator
- Its weight

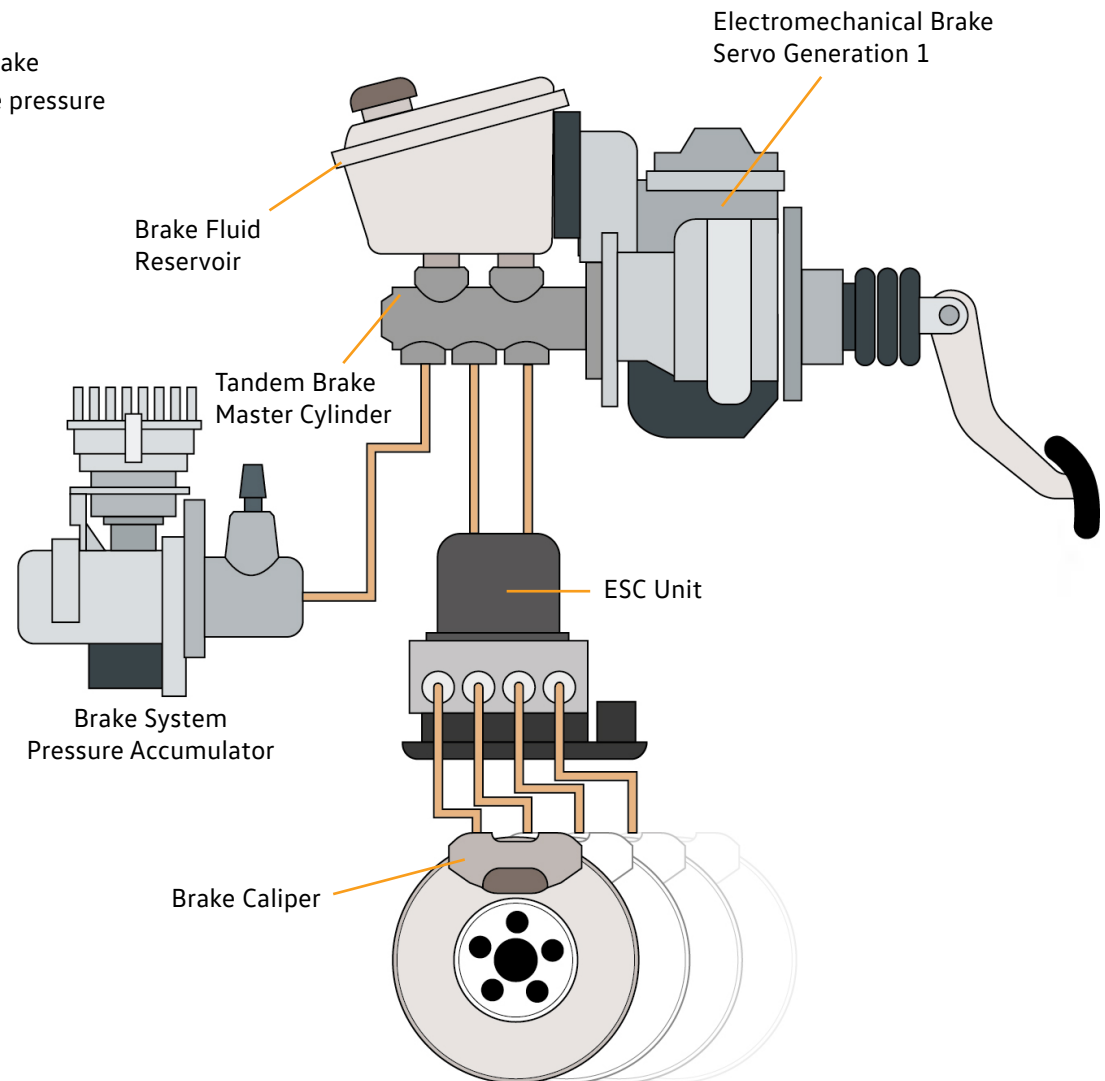

# Introduction


---

## Electronic Brake Servo

The eBKV has an accumulator integrated into the ESC unit that holds brake fluid during recuperation, instead of an external brake system pressure accumulator.

The advantages of this system are:

- No additional space required for additional components
- Weight reduction
- Lower CO<sub>2</sub> emissions
- Reduced costs

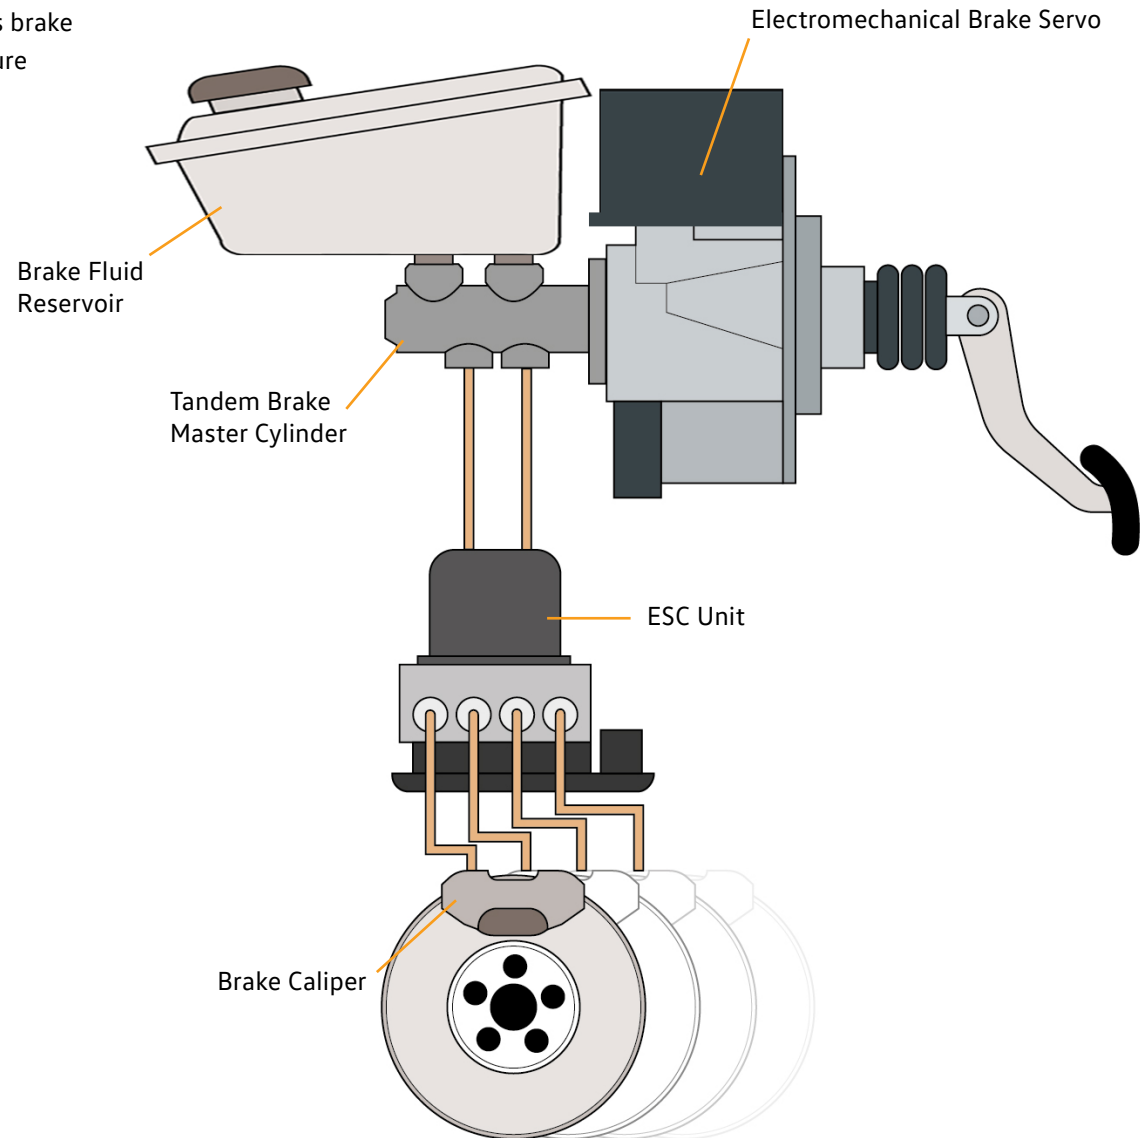


# Design of the eBKV

---

## Exterior Design

The eBKV has the following components:

- The housing
- The push rod with boot
- The motor/gear unit
- J539 Brake Booster Control Module
- The brake fluid reservoir
- The tandem brake master cylinder

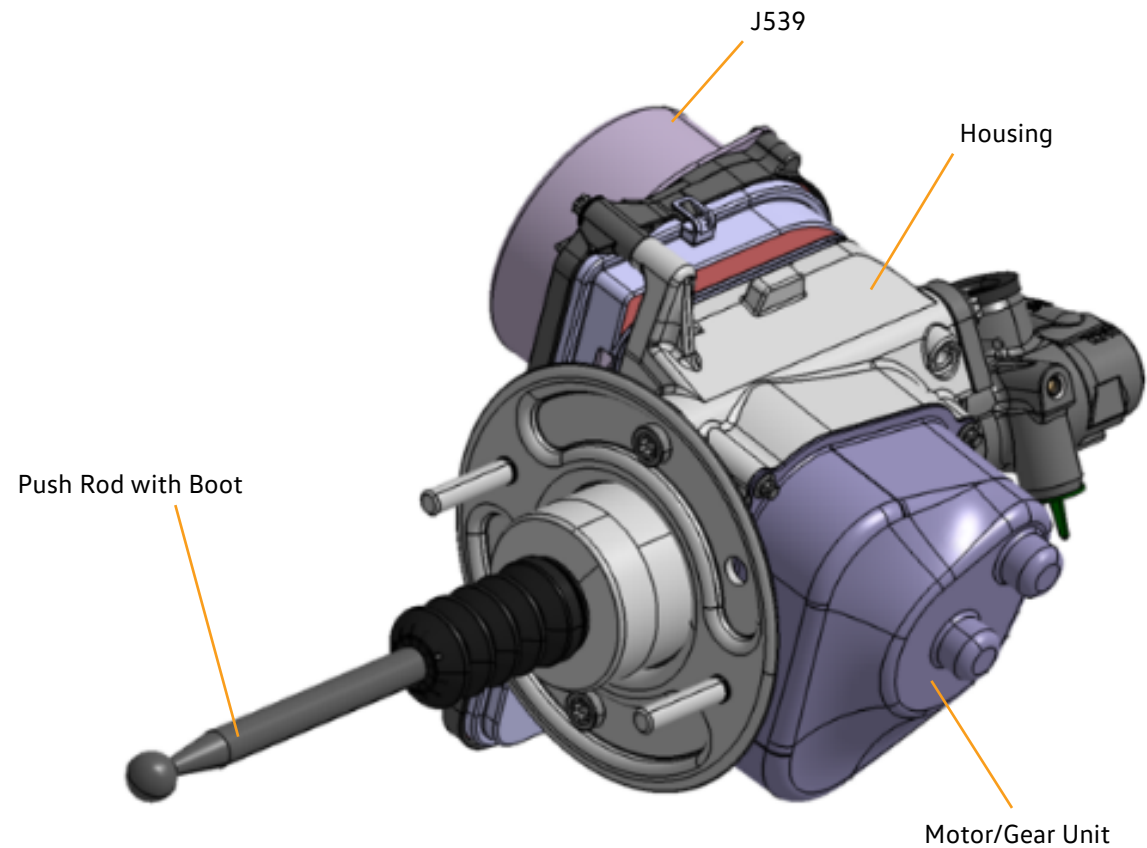

# Design of the eBKV

## Function

When the driver presses on the brake pedal, the push rod introduces this movement into the assembly. This movement is sensed by Brake Pedal Position Sensor G100, which is part of the Brake Booster Control Module J539.


The G840 Brake Booster Motor Position Sensor relays the current motor position. The Brake Pedal Position Sensor G100 and G840 Brake Booster Motor Position Sensor are built into the Electromechanical Brake Servo (eBKV) and are not serviceable separately.

The J539 uses the information about the driver's brake request and the motor position to calculate the brake servo movement required.

To initiate movement, the reinforcing sleeve is moved to the left by the pinion shafts, located on either side of the reinforcing sleeve.

As the reinforcing sleeve moves, the push rod also moves. The braking force is increased by seven to eight times when the electromechanical brake servo is used.

When the braking request is removed, the spring located between the master cylinder and the reinforcing sleeve pushes the reinforcing sleeve/push rod back to its original position.

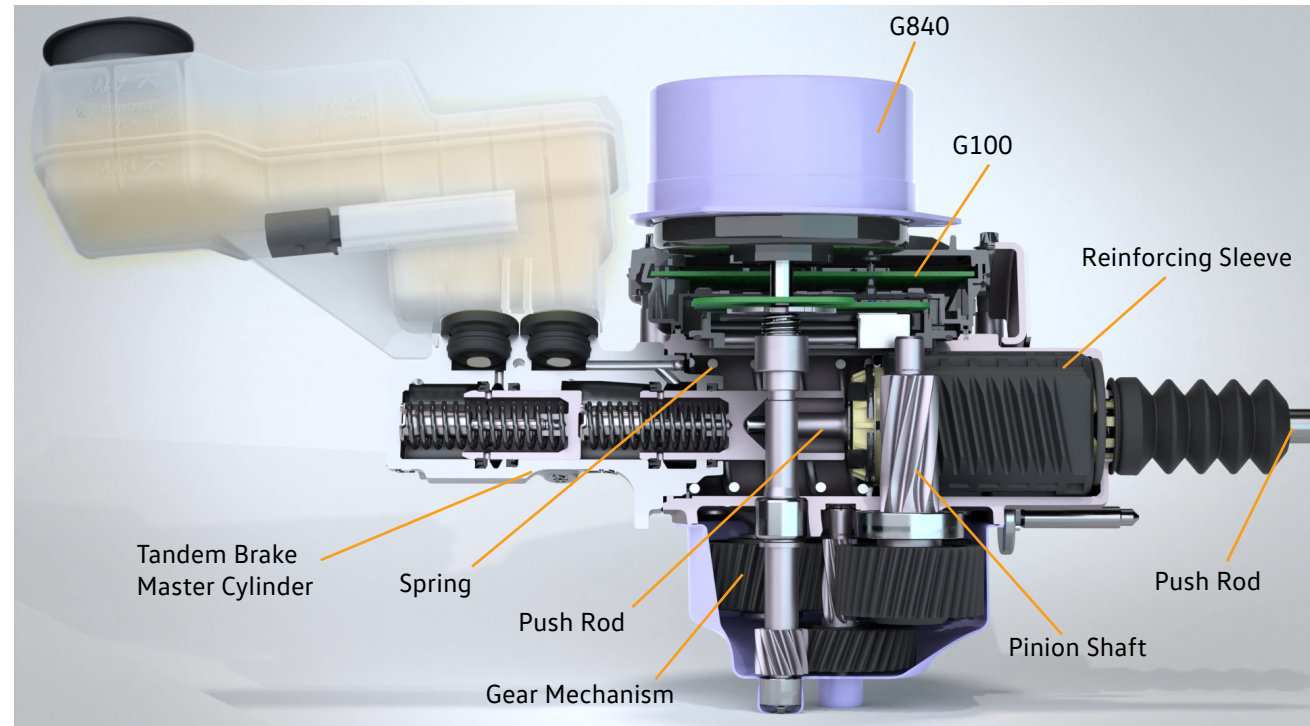

# Design of the eBKV

## Released and Engaged Positions



These overhead images illustrate the released and engaged positions as described on the previous page.

### Released position:

- The parallel pinion shafts rest on the left side of the reinforcing sleeve
- The spring is relaxed

### Engaged position

- The parallel pinion shafts have moved the reinforcing sleeve to the left
- The spring is compressed

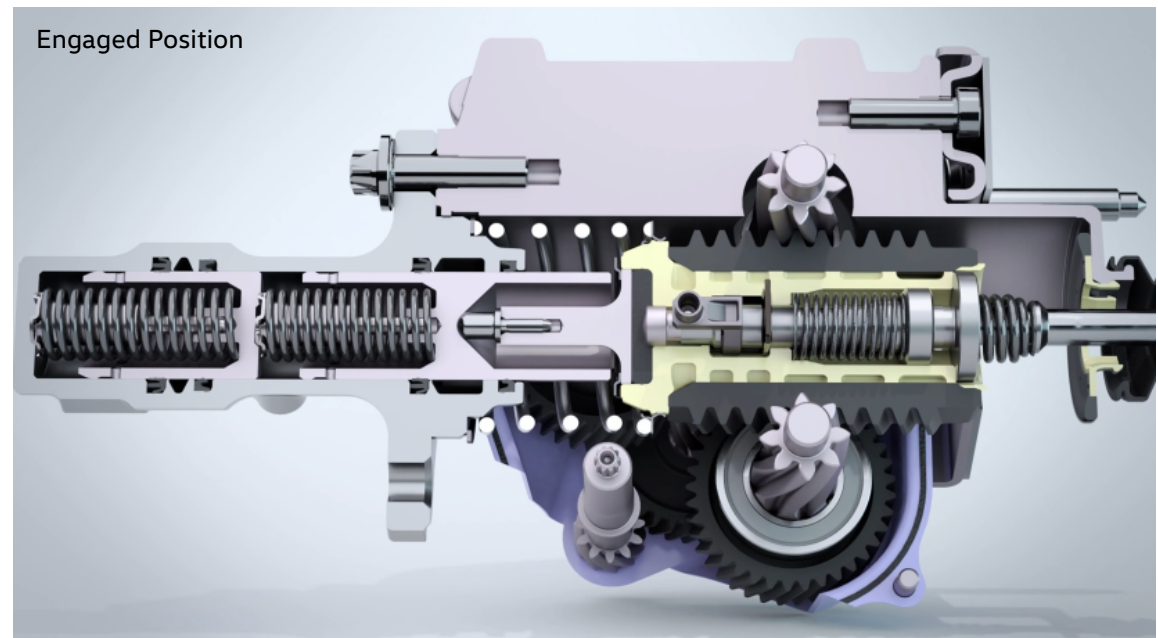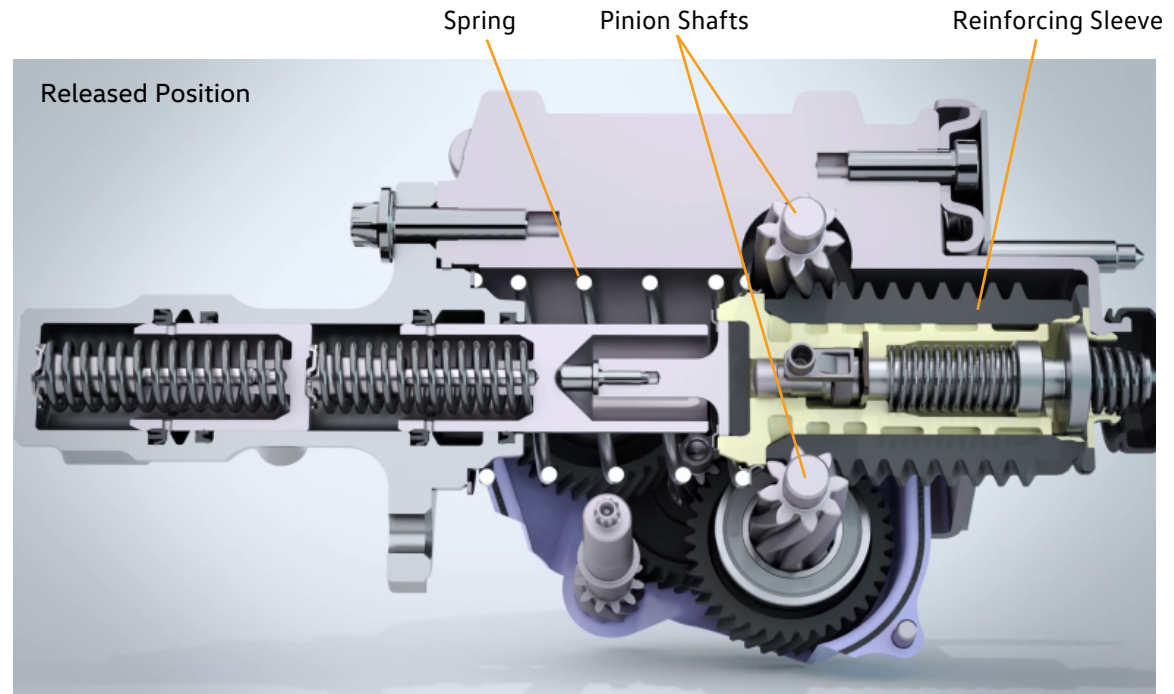


# Design of the eBKV

---

## Design in Detail - Pressure Accumulator in the ESC Unit

When compared to the 1st Generation eBKV, the active pressure accumulator has been removed. The pressure accumulator function is now integrated into the ESC unit. The ESC unit has a larger volume to accommodate this function.

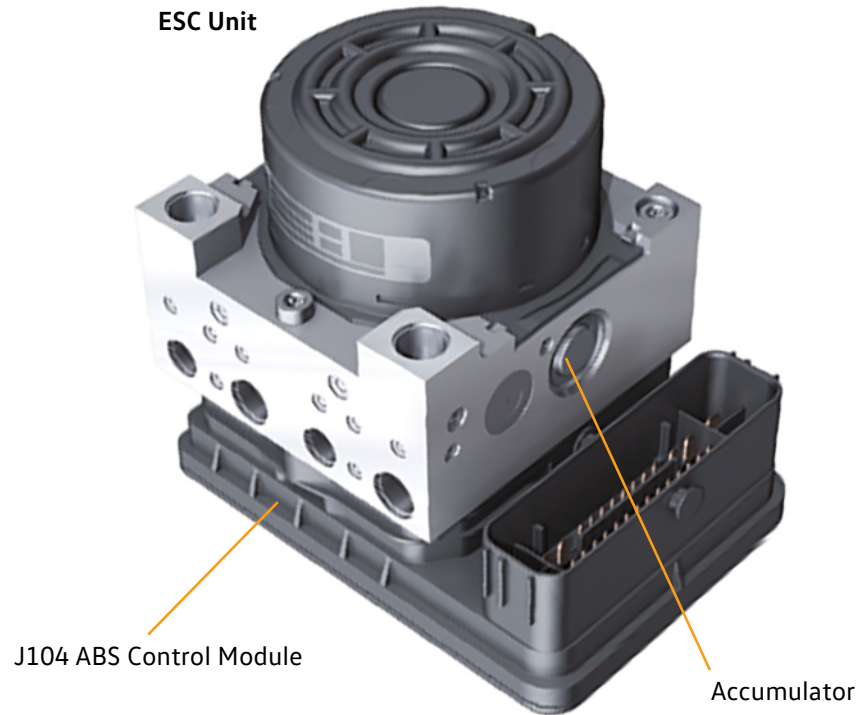

# Design of the eBKV

---

## G100 Brake Pedal Position Sensor - Design and Failure Effects


### Design

The brake pedal position sensor has two Hall sensor elements on the boost body and a slide with four Hall magnets. The magnets are connected to the input push rod.

When the driver presses the brake pedal, the Hall magnets move over the Hall sensors. This movement is interpreted as a braking request by the brake servo system

### Failure Effects


If the G100 fails, the brake function is taken over by the ESC unit. If the electromechanical brake servo and ESC fail at the same time, purely mechanical braking is still possible.

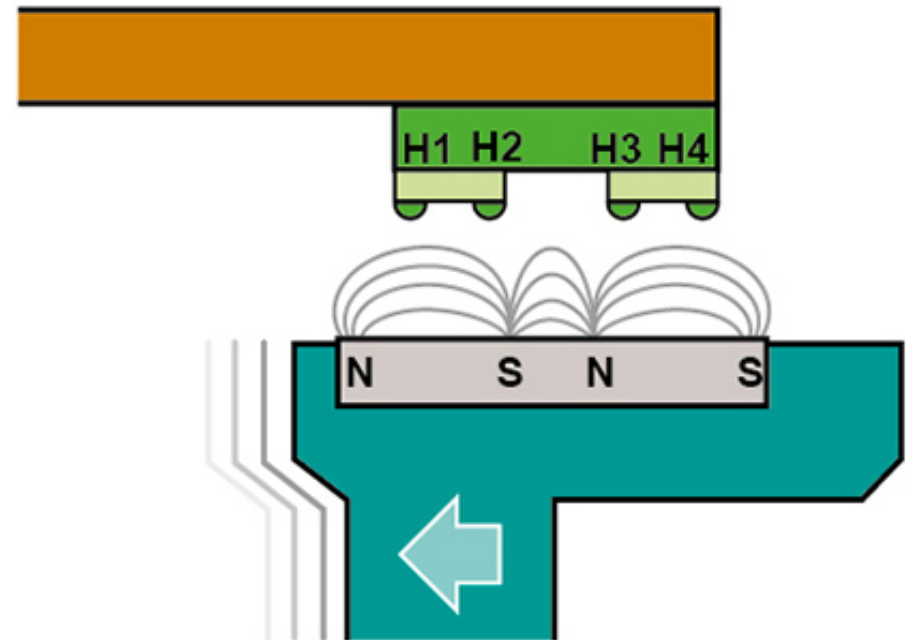

# Brake Management

## Network System

The eBKV is connected to the engine and transmission control modules using CAN-Bus.

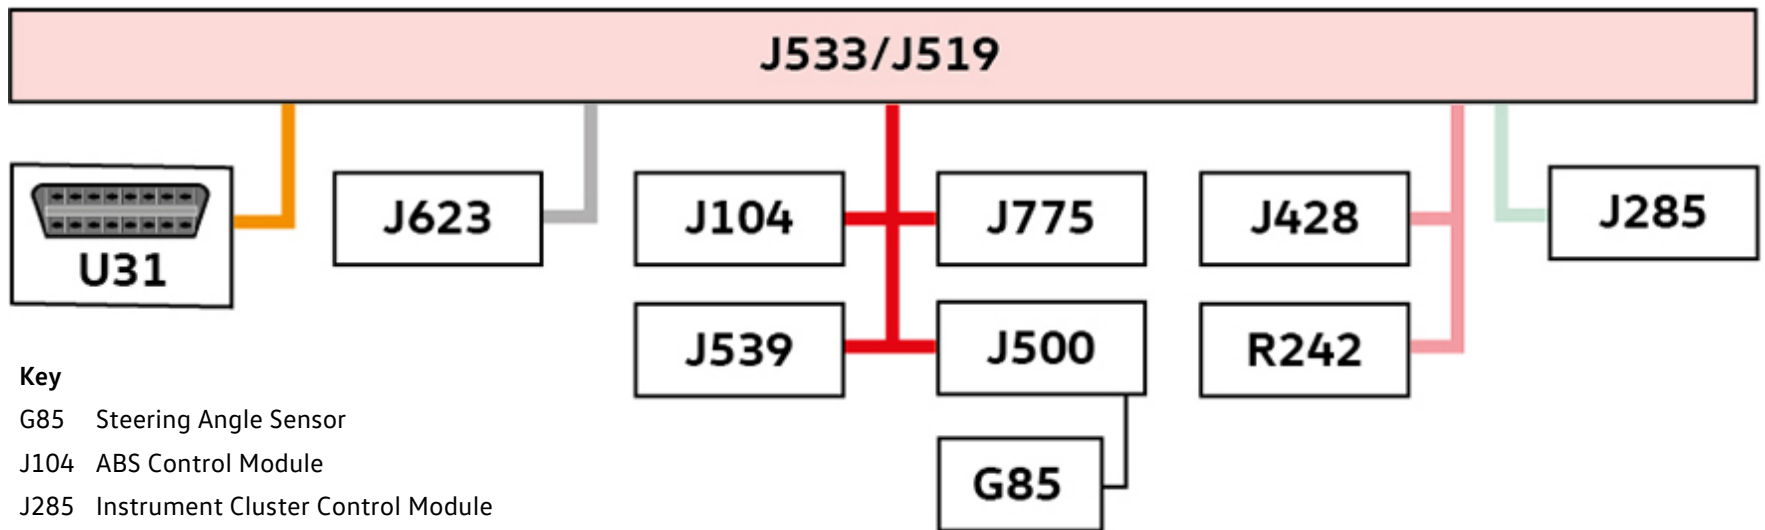

### Key

- G85 Steering Angle Sensor
- J104 ABS Control Module
- J285 Instrument Cluster Control Module
- J428 Control Module for Adaptive Cruise Control
- J500 Power Steering Control Module
- J519 Vehicle Electrical System Control Module
- J533 Data Bus On Board Diagnostic Interface
- J539 Brake Booster Control Module
- J623 Engine/Motor Control Module
- J775 Drivetrain Control Module
- R242 Driver Assistance Systems Front Camera
- U31 Diagnostic Connection

- Powertrain CAN-bus
- Running Gear CAN-bus
- Drivers Assist System CAN-bus
- Convenience CAN-bus
- Diagnostic CAN-bus
- Analogue Connection




# Brake Management

## What is Brake Blending?

The term “brake blending” comes from high-voltage vehicles. The three phase current drive of a high-voltage vehicle can be used in regenerative mode to brake (decelerate) the vehicle speed. Part of the vehicle’s kinetic energy is converted into electrical energy and thermal energy during the process and the vehicle speed decreases.

Depending on the battery charge level and the temperature of the high-voltage battery, it is not always possible to use the high-voltage system for deceleration. Any fluctuations in deceleration are covered by the hydraulic brake system.


Since the eBKV responds much faster than vacuum-based systems, this collaboration between hydraulic braking and high-voltage braking is very efficient.

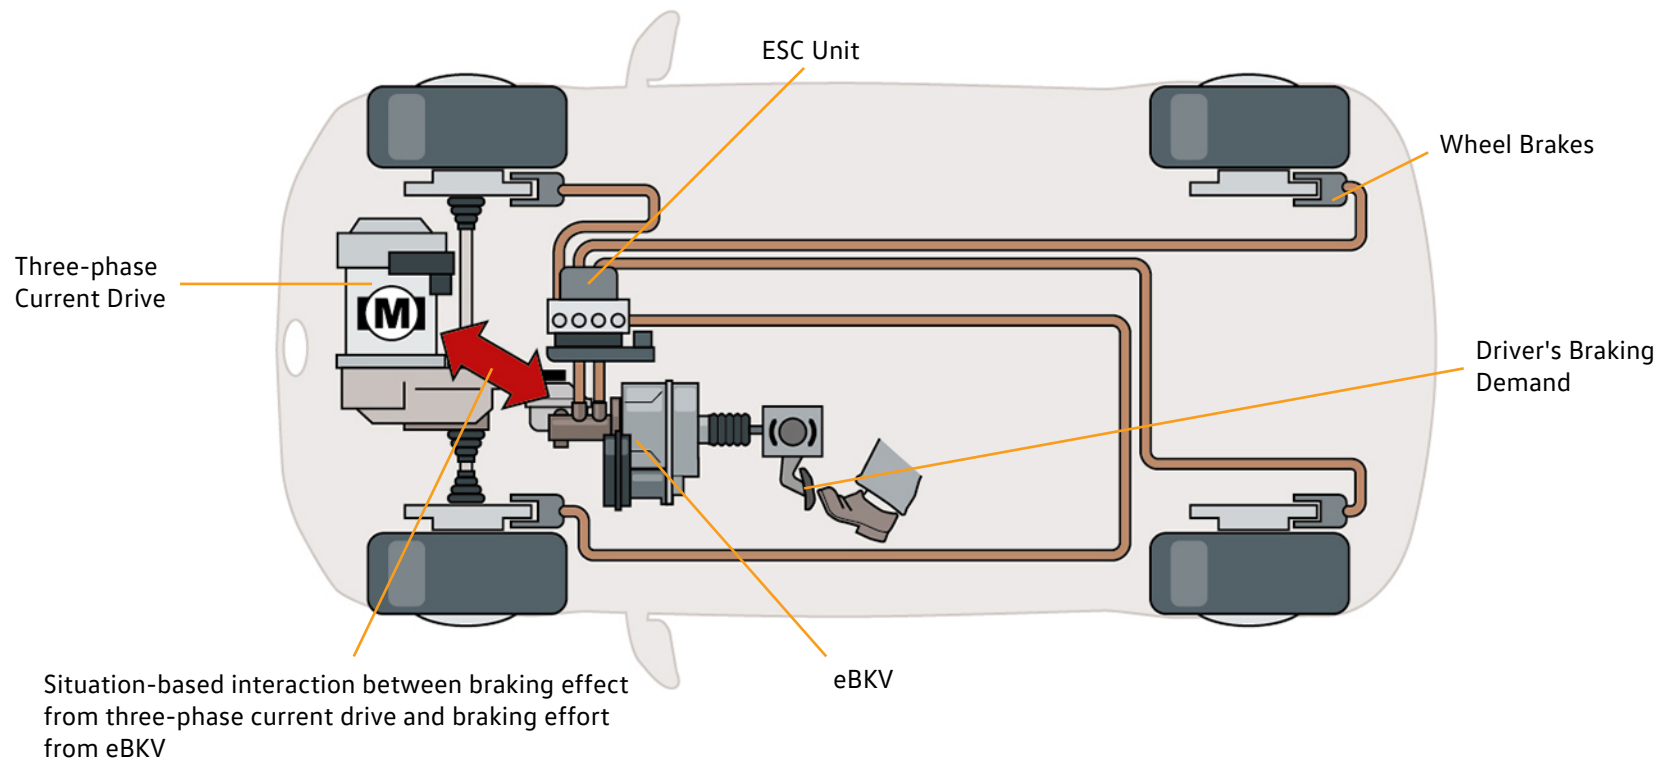

# Brake Management

## Brake Blending Process - Deceleration Requirement


When brake pedal actuation occurs, which is detected by the J539 Brake Booster Control Module, the eBKV will build up pressure.

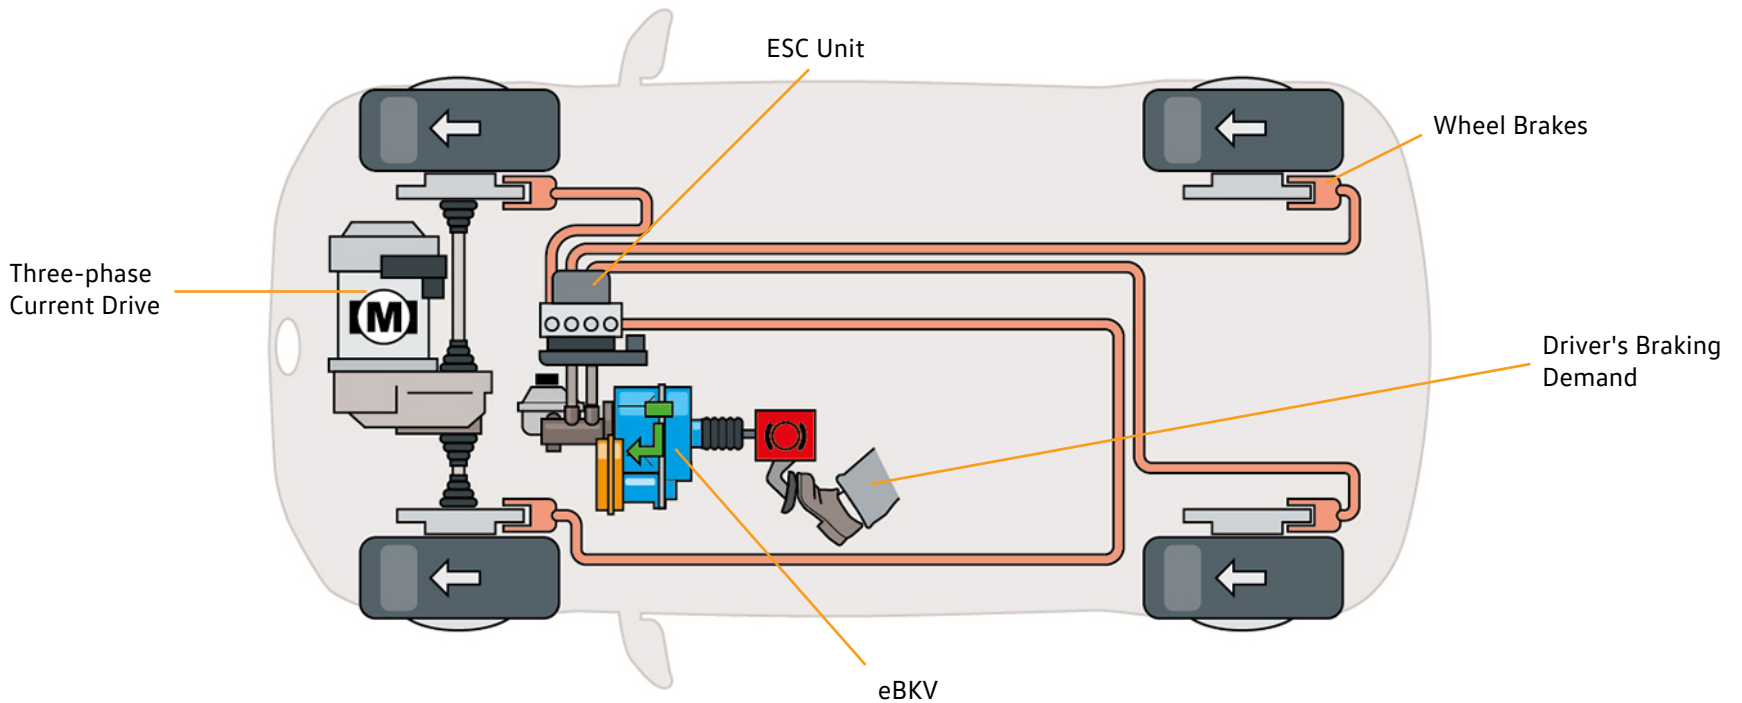

# Brake Management

## Brake Blending Process - Frictional Deceleration

The brake pressure built up in the hydraulic brake system presses the brake pads against the brake disc. Due to the resulting friction, part of the vehicle's kinetic energy is converted into thermal energy and radiated. This energy is lost.

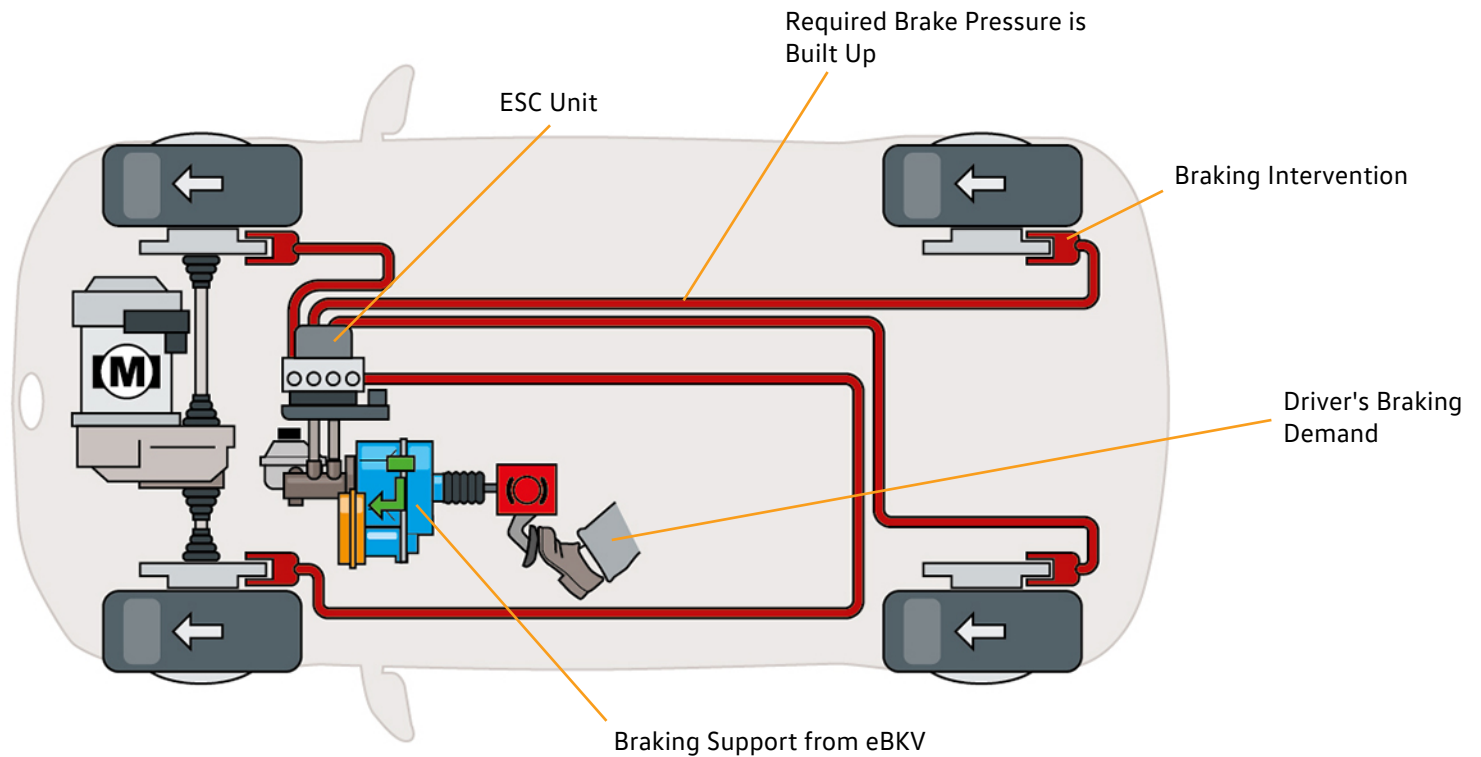


# Brake Management

## Brake Blending Process - Regenerative Deceleration

If the charge level of the high-voltage battery and its temperature are suitable, a large part of the frictional deceleration can happen using the regenerative mode of the three-phase current drive.

The vehicle's kinetic energy is converted into electrical energy, stored in the high-voltage battery and can be used for acceleration. In this process, which is known as recuperation, a small amount is lost as thermal energy due to bearing friction and the heat occurring during induction.

Since the braking effect happens using the high-voltage drive, brake pressure in the hydraulic system and the electrical brake force boosting are reduced. Electrical energy is saved by the not using the hydraulic brake system.

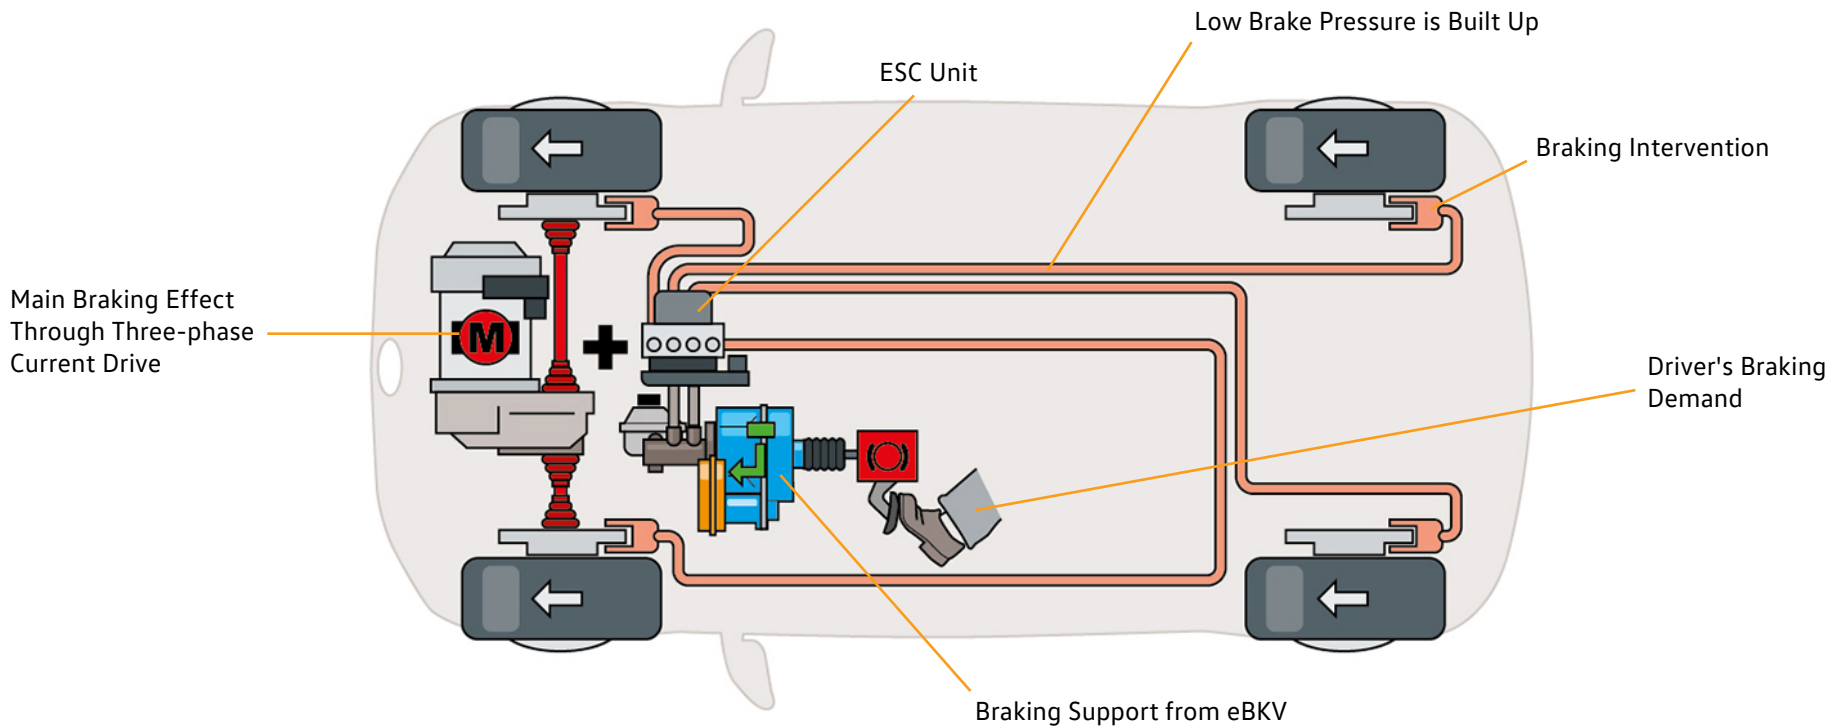


# Brake Management

## Brake Blending Process - Supporting Deceleration

If the charge level of the high-voltage battery and its temperature do not allow recuperative deceleration to be used, hydraulic braking must be used to slow the vehicle. The eBKV and the hydraulic brake system intervenes and supplies the required braking force using the wheel brake cylinders.

The driver does not notice any of this interaction since the eBKV acts autonomously and will automatically build up the brake pressure without driver intervention.

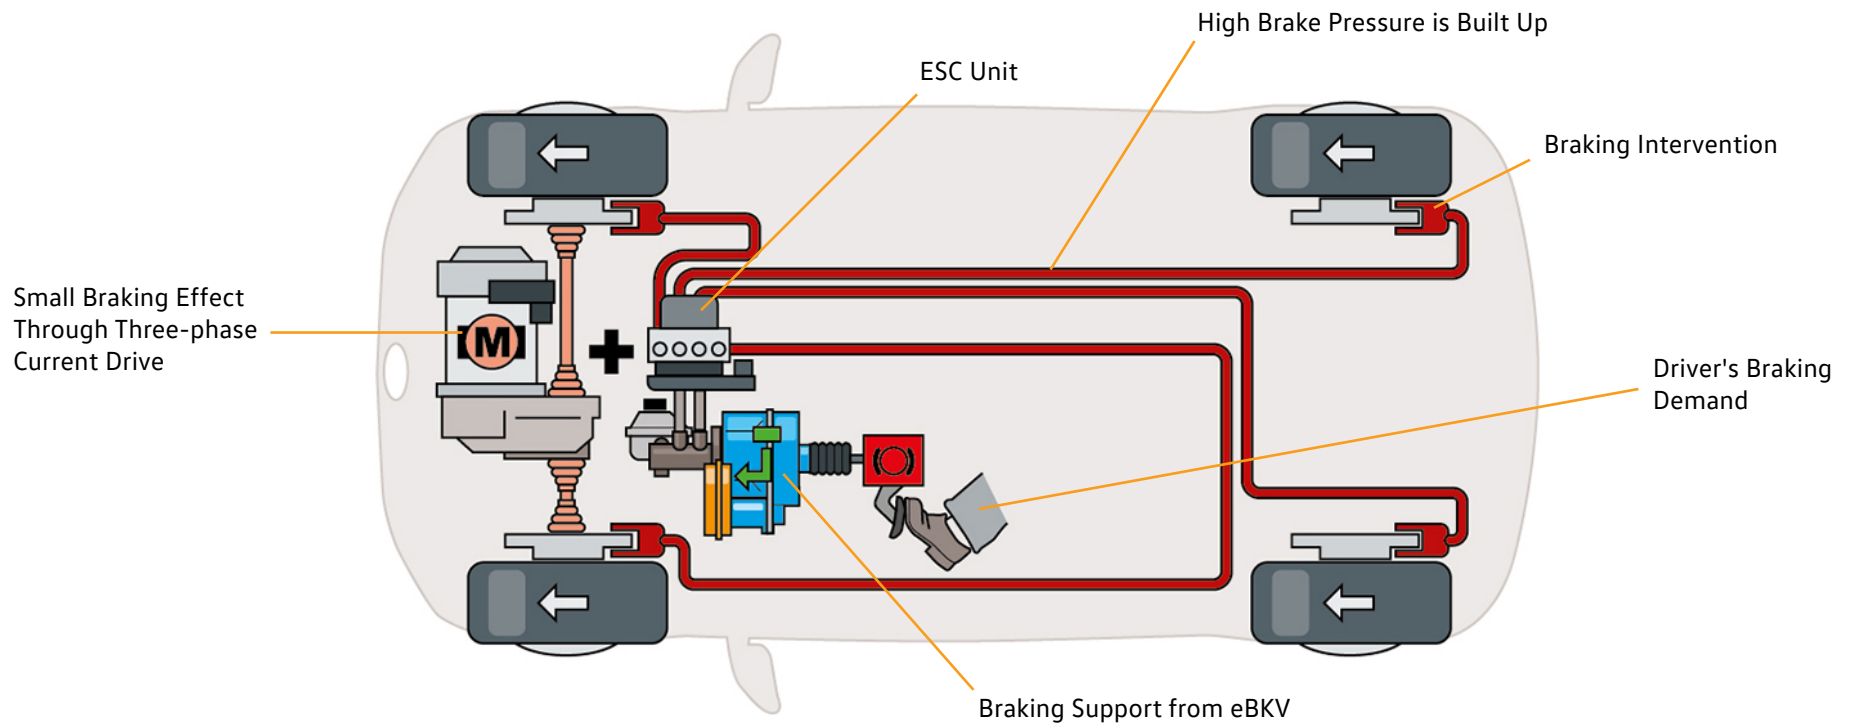



## Service - Work After the Electromechanical Brake Servo is Replaced

If defective, eBKV must be replaced as a complete unit. Once the new eBKV has been installed, the brake system needs to be checked for free movement and also bled by means of a pressure test:

- A free movement test is performed first. This involves testing the mechanical functions of the brake servo
- The pressure test is then performed with the vehicle diagnostic tester using "Guided Functions"



The individual steps for changing a new electromechanical brake servo vary according to model.

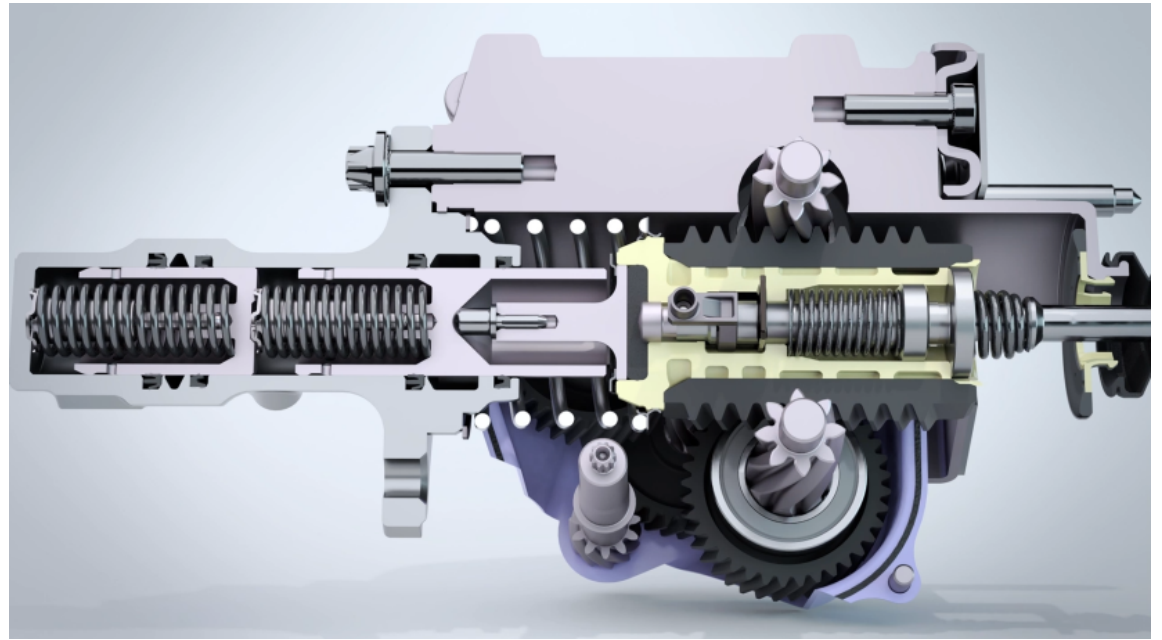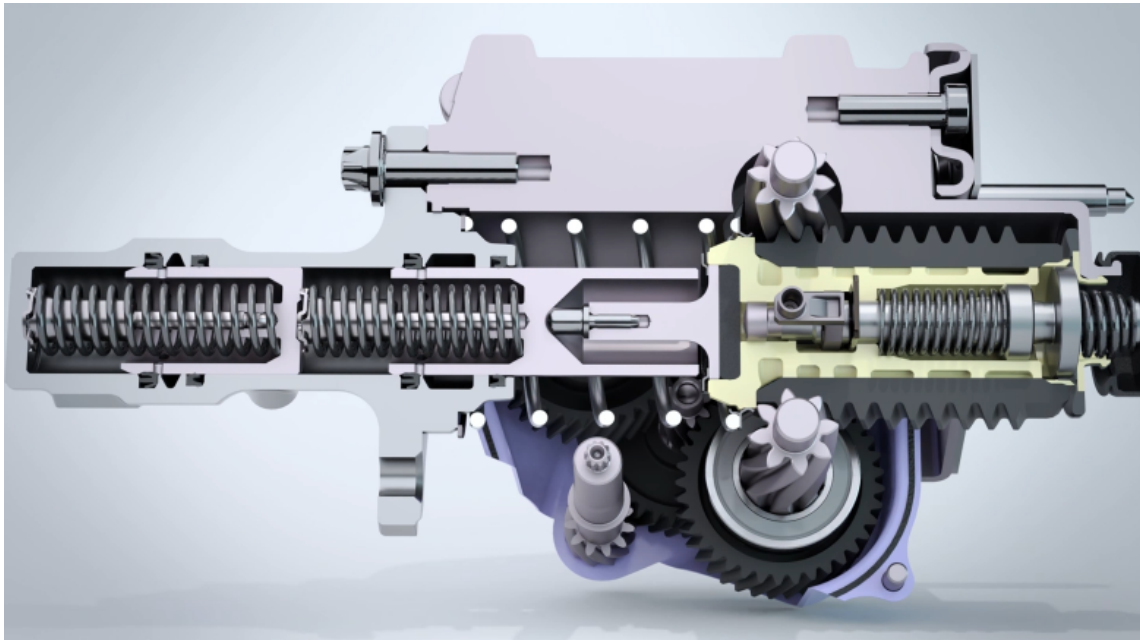

Volkswagen Group Canada  
777 Bayly St W,  
Ajax, ON L1S 7G7  
August 2021

